

# Alufast/G Series




This serie incorporate a fixed bench and movable head system, adopting the format of head with traction in the axis "X" to both sides of the consoles, with two independents motors, called Gantry system, wich allows us to reach lengths in the "Y" axis up to 1000mm. and greater than 12000mm in the "X" axis, ensuring high precision and the absence of vibrations during the machining.

The subjection is realized by pneumatic clamps, installed on consoles than can be posicioned automatically or manually.

Machines with desplacements of up to 80 mt/min.

*Pre-tightening safety cycle for securing the profile, for accident prevention.*

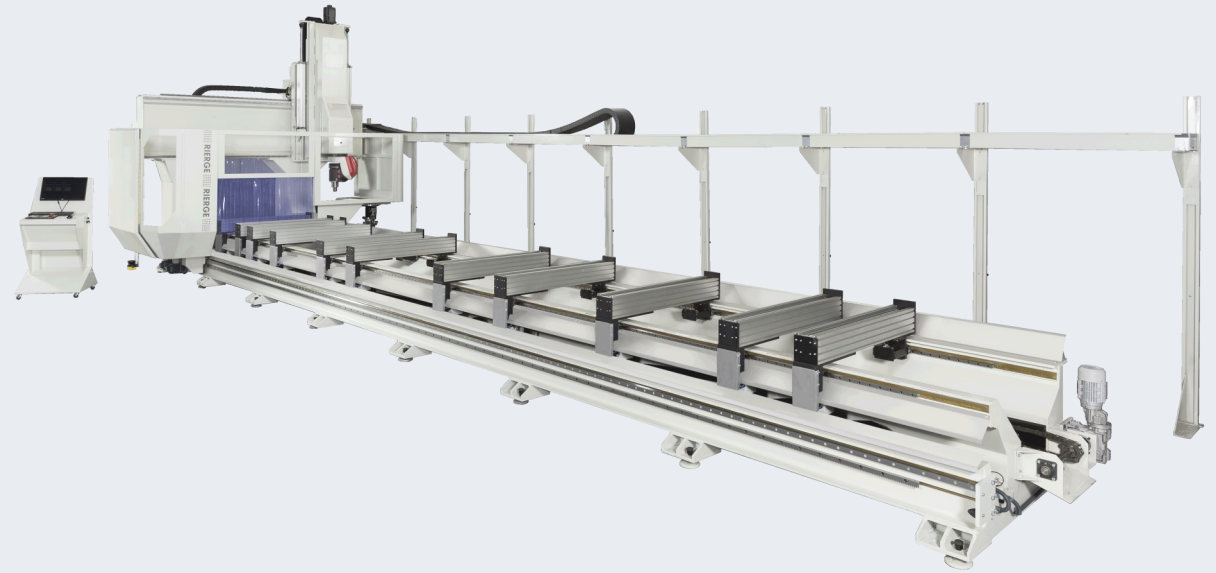

	70100	100100	150100
X	7000	10000	15000
Y	1000	1000	1000
Z	500	500	500
Other measures availables on demand			

# Alufast/G Series



## Head Composition.

- Vertical 5 axis milling spindle.
  - ⇒ Type ES 779, 18kw HSK/63 (5 axis)
  - ⇒ Type ES 369, 13kw HSK/63 (5 axis)
- Rotary tool's change storage with 10/12/16 Pos.
- Tool change point for large dimensions disks.
- Consoles gifts with progressive tightening.
- TopSolid
- CNC Siemens 840 DSL.

Other configuration is possible on demand.

